

5-Port Gigabit Unmanaged Hi-PoE Switch

switches are layer 2 Hi-PoE switches, providing advanced PoE power supply technology and Gigabit networks design on the basis of high-performance access to ensure stable data upload. The switches support Hi-PoE, long range, port isolation, and PoE watchdog function.



Key Feature


- 3 × gigabit PoE ports, 1 × gigabit Hi-PoE port and 1 × gigabit RJ45 port.
- IEEE 802.3at/af/bt standard for Hi-PoE port (Max. 60 W PoE output).
- IEEE 802.3at/af standard for PoE ports (Max. 30 W PoE output).
- IEEE 802.3, IEEE 802.3u, IEEE 802.3x, and IEEE 802.3ab standard.
- 6 KV surge protection for PoE ports.
- Up to 300 m long-range transmission.
- PoE watchdog to auto detect and restart the cameras that do not respond.
- Port isolation to improve network security.
- Gigabit network access design.
- Wire-speed forwarding.
- Store-and-forward switching.
- Solid high-strength metal shell.
- Reliable fan-free design.

Specification


Model		
Network parameters	Port number	3 × gigabit PoE ports, 1 × gigabit Hi-PoE port and 1 × gigabit RJ45 port
	Port type	RJ45 port, full duplex, MDI/MDI-X adaptive
	Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, and IEEE 802.3ab
	Forwarding mode	Store-and-forward switching
	Working mode	Standard mode (default), Extend mode, Isolation mode, PoE watchdog mode
	Ports for long-distance transmission	Ports 3 and 4
	MAC address table	2 K
	Switching capacity	10 Gbps
	Packet forwarding rate	7.44 Mpps
	Internal cache	1 Mbits
PoE power supply	PoE standard	Port 1: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 2 to 4: IEEE 802.3af, IEEE 802.3at
	PoE power pin	Ports 1 to 4: Ethernet cables 1/2/3/6 and 4/5/7/8 provide power supply simultaneously.
	PoE port	Ports 1 to 4
	Hi-PoE port	Port 1
	Max. port power	Port 1: 60 W Ports 2 to 4: 30 W
	PoE power budget	60 W
Dialing function	Long range	Ports 3 and 4: up to 300 m; and the speed rate of the port is 10 Mbps.
	Port isolation	Ports 1 to 4: port isolation mode to improve network security.
	PoE watchdog	Ports 1 to 4: auto detect and restart the cameras that do not respond.
General	Shell	Metal material, fan-free design
	Net Weight	0.27 kg (0.59 lb)
	Dimension (L × H × D)	121 mm × 88.1 mm × 27.6 mm (4.76" × 3.47" × 1.09")
	Operating temperature	-10 °C to 40 °C (14 °F to 104 °F)
	Storage temperature	-40 °C to 85 °C (-40 °F to 185 °F)
	Operating humidity	5% to 95% (no condensation)
	Storage humidity	5% to 95% (no condensation)
	Power supply	48 VDC, 1.35 A
	Power consumption in idle	< 5W
	Max. power consumption	65 W
Power source	65 W	
Approval	EMC	FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016)
	Safety	UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)

Physical Interface


Front panel:

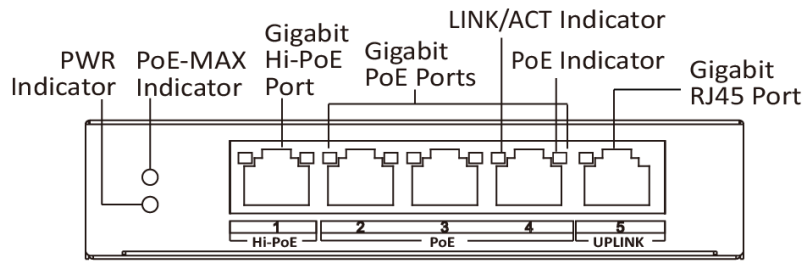

Back panel:

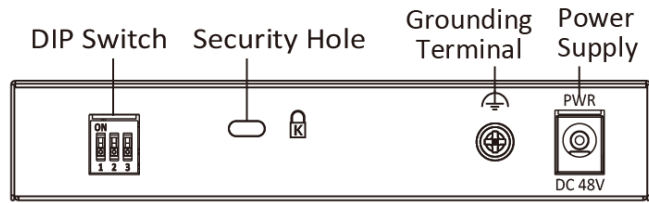

Dimension (unit: mm)

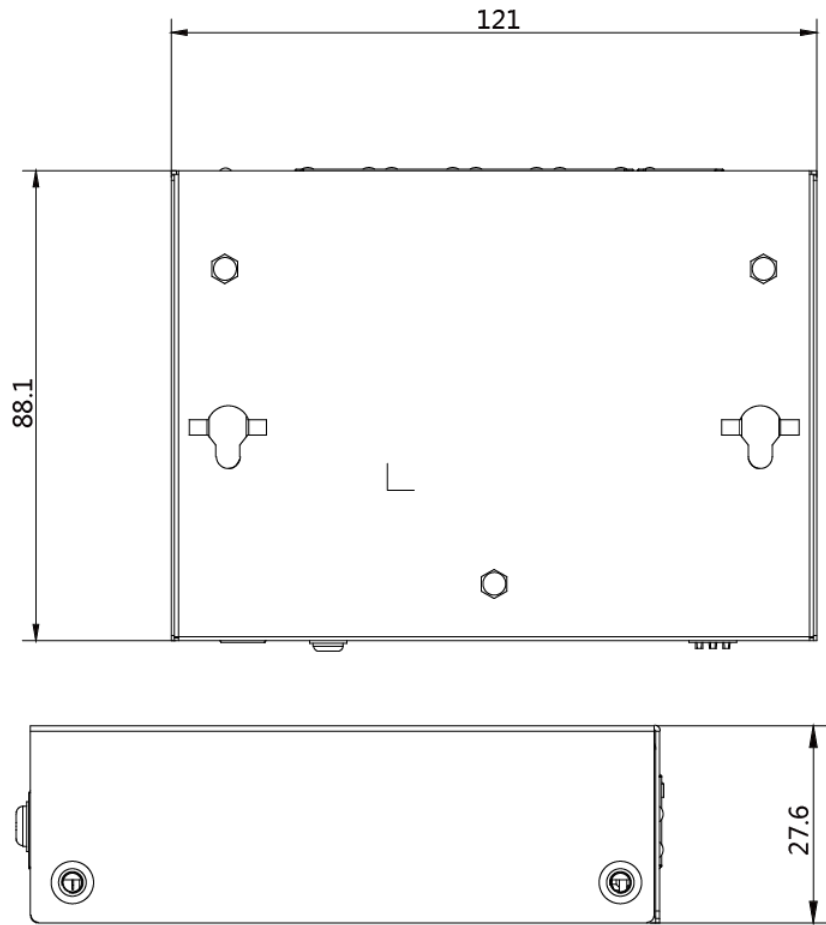

Typical Application

— Data
— Power+Data(PoE)

